




GPG



- DŁAWNICA KABLOWA
- materiał: samogasnący poliamid (PA66)
- gwint typu PG
- uszczelki neoprenowe

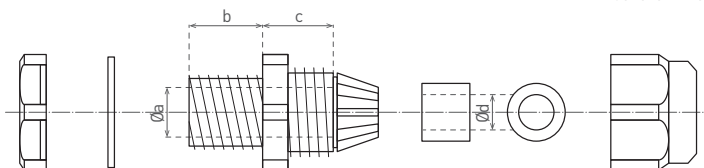


			\overleftarrow{a} [mm]	\overleftarrow{b} [mm]	\overleftarrow{c} [mm]	\overleftarrow{d} [mm]		
GPG-7	GXOS180	8592660109534	8	8	12,8	6	3,5-6	1-100-6000
GPG-9	GXOS181	8592660109541	9,9	8,1	13,9	7	4-8	1-100-4000
GPG-11	GXOS182	8592660109558	13,2	8,2	15,4	9,6	5-10	1-100-2500
GPG-13,5	GXOS183	8592660109565	15,2	8,9	15,8	11,7	6-12	1-100-2000
GPG-16	GXOS184	8592660109572	17,2	8,9	17,3	12,9	9-15	1-100-1500
GPG-21	GXOS185	8592660109589	22,4	10,8	18,6	16,5	13-18	1-100-1000
GPG-29	GXOS186	8592660109596	30,6	10,9	20,5	23,3	18-25	1-50-600
GPG-36	GXOS187	8592660109602	35,2	14,4	24,4	33,3	22-32	1-20-200
GPG-42	GXOS188	8592660109619	39,3	14,6	25,4	39,6	30-38	1-20-100
GPG-48	GXOS189	8592660109626	45,4	15,8	25,2	45,1	34-44	1-20-180



BL - EVG EB



- STATECZNIK ELEKTRONICZNY (EVG)
- europejska marka i najwyższa jakość
- energooszczędny - niskie straty energii
- przeznaczony do świetlówek typu T8
- "ciepły start" wydłuża żywotność świetlówek
- stabilizowane parametry wyjściowe
- 5-letnia gwarancja



				\overleftarrow{a} [mm]	\overleftarrow{b} [mm]	\overleftarrow{c} [mm]	\overleftarrow{d} [mm]	
BL - EVG EB 1 x18W	GXOS160	8592660111339	T8: 1 x18W	280	30	28	270	190
BL - EVG EB 1 x36W	GXOS161	8592660111346	T8: 1 x36W	280	30	28	270	191
BL - EVG EB 1 x58W	GXOS162	8592660111353	T8 : 1 x58W	280	30	28	270	193
BL - EVG EB 2 x18W	GXOS163	8592660111360	T8: 2 x18W	280	30	28	270	200
BL - EVG EB 2 x36W	GXOS194	8592660118789	T8: 2 x36W	280	30	28	270	190
BL - EVG EB 2 x58W	GXOS165	8592660111384	T8: 2 x58W	280	30	28	270	190
BL - EVG EB 4x18W	GXOS166	8592660111391	T8: 4x18W	280	30	28	270	200